

## TMP65-3



Motor Pumps Powermate TMP series is the right answer to handle clean to semi-trash water in all sites. TMP series is conceived to work in tough conditions and guarantee performance despite muddy works sites. Pumps feature limited self-priming. Pump body filling with liquid is not mandatory requirement, although it will help to speed up the working time. Sturdy roll frame for added protection and easy maintenance.


### FEATURES

- Powermate OHV engine, 4-Cycle
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decal)
- Pump type: Semi-trash
- Cast Iron Volute and Impeller for durability
- Roll cage for added protection



### Main Technical Data

Type	Semi-trash water pump	
Max suction head	m	7
Max Delivery Head	m	29
Delivery Volume	l/min	1080
Inlet pipe diameter	inches	3
Outlet pipe diameter	inches	3
Max Solid size	mm	20

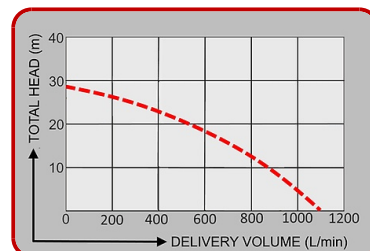

## Engine

Brand		Powermate
Type		OHV
Operating Speed Nominal	rpm	3600
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	0.6
Low Oil Shutdown		√




## Autonomy

Fuel tank capacity	l	3.6
Fuel consumption @ 75%	l/h	1.8
Running time @ 75%	h	2.0



## Dimensional data

Length	(L) mm	560
Width	(W) mm	435
Height	(H) mm	420
Dry weight	Kg	31
Carton box dimension LxWxH	mm	605x445x460

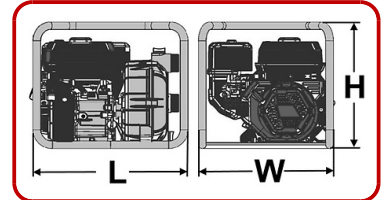

## Noise emission

Guaranteed noise level (LWA)	dB(A)	108
Noise level at 7 m	dB(A)	79

## General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		√
Oil guard		√



The information is aligned with the Data file at the time of download. Printed on 09/03/2020 (ID 6453)

©2019 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

**Powermate**  
by PRAMAC